



GRIFFIN TILE

24 OZ. NONWOVEN TWISTED LOOP SCRAPER

Made for the Spaces That Never Slow Down



When foot traffic is constant, flooring has to work harder.

This designer loop-pile carpet tile delivers the durability active interiors demand with a clean, modern look that holds up over time. Its low-profile construction creates a streamlined finish while supporting the easy movement of furniture, rolling carts, and everyday activity.

Ideal for entrances, offices, retail spaces, spas, corridors, waiting areas, and other high-traffic environments.

Modern style. Reliable performance. Made for spaces that never slow down.

SOLUTIONS FOR EVERY ENVIRONMENT
1+ 866 284 6287 | www.vangelder-inc.com

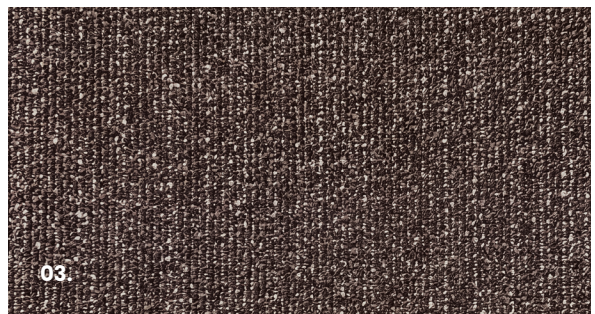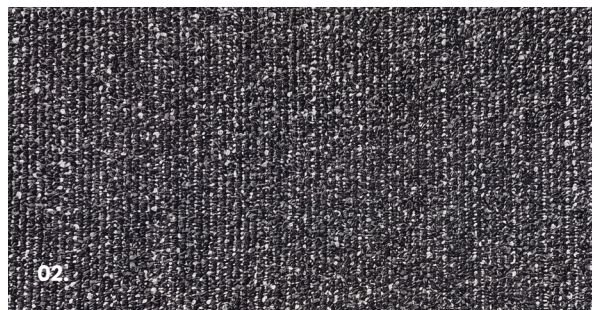

1. Night Stone

2. Harbor Grey

3. Sandy Brown

GRIFFIN TILE

24 OZ. NONWOVEN TWISTED LOOP SCRAPER



SUGGESTED USES (Not limited to)

Entryways, Conference Rooms, Lobbies, Libraries, Office Environments, Retail/ Department Stores, Resorts, Restaurant Entryways, Spas, etc.

Construction:	Nonwoven Twisted Loop Pile Structure
Fiber:	28% Globe Nylon + 72% Polypropylene Scraper Yarn
Backing:	Eco Bitumen
Pile Height (± 0.5mm):	Tufted 1/10" Loop
Total Height (± 7.5%):	.25"±
Pile Weight (± 7.5%):	24 oz/yd ²
Tile Size (± 2%):	19.69" x 19.69"

LIMITED WARRANTY

Full Commercial Warranty 5 year

Summary of Warranty:

van Gelder Inc. warrants Griffin Carpet Tiles against wear for a period of 5 yrs in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to van Gelder Inc. within the Warranty period, van Gelder Inc. will supply new material of same or similar grade to repair or replace the defective material.

- **Wear**
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 1 year from date of purchase, van Gelder Inc. will provide replacement materials or repair, of only the effected area.
- **Manufacturing Defects**
van Gelder Inc. warrants Griffin Carpet Tiles materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to five [5] years from date of purchase. van Gelder Inc. will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- **Other Limitations**
 - This warranty is non-transferable
 - Manufacturing defect must be reported within 3 months from date of purchase.
 - This Warranty covers only properly installed & maintained floors
 - van Gelder Inc. excluded and will not pay for any consequential or incidental expenses.
 - van Gelder Inc. reserves the right of final judgment and may refuse claims in certain instances.

*For a copy of the full warranty please ask for a warranty sheet.

PACKAGING & DIMENSIONS

TILES (19.69" X 19.69" EA.): 20 TILES PER BOX (54 SQ. FT.)

ELECTROSTATIC PROPERTIES

Dimensional Stability (EN 986):	Pass
Electrostatic Propensity (EN 1815):	>2kV
Electrical Resistivity (IBM / ICL):	Pass, for R.H. ≥40%
Sound Insulation (ISO 10140-1:2010):	≥24dB
Thermal Retention (ISO 11092):	0.13 m K/W Pass

FLAMMABILITY

Smoke Density (ASTM E662):	Pass
Surface Flammability (FF 1-70 / ASTM D2859):	Pass

LEED-NC

MR Credit:	4
IEQ Credits:	4.1, 4.3, 5

EXPERIENCE IT FOR YOURSELF

Talk with your sales representative or request samples at samples@vangelder-inc.com

INSTALLATION (TILE)

Before laying tiles, it is recommended they are stored at room temperature 60°F-70°F (15°C-20°C). The tiles can be loose laid on flat, dry floors free from impurities such as oil, grease etc. Cracked floors should be filled, and uneven floors covered with hardboard. Dusty floors should be primed. Because of the high insulation value of these tiles it is not recommended they be laid when under-floor heating systems are in use. On very large installations, it is advisable to secure 1 in 5 rows with double-sided tape. Where tiles are to be used under caster chairs, tiles should be fully secured. The tiles may be laid by marking across in the center of the room and working outwards from this, the marker cross may be moved to facilitate these of full tiles in doorways, etc. Tiles must be laid by turning alternate tiles through 90 degrees to obtain a checker pattern. An arrow on the back of each tile indicates the pile direction. Only tiles with the same batch number should be laid together.

*For Sheet/Roll installation and other information, go to www.vangelder-inc.com

MAINTENANCE

Regular vacuuming (Weekly in low-traffic areas, and daily or twice daily in areas with higher traffic) with a motor-driven brush and beater bar can remove up to 80% of surface dirt, and is the easiest way to prolong the life of your carpet. Regular vacuuming is key to maintaining your carpet, but eventually the carpet color dulls from dirt and grime stuck in the fibers. The dirt is then carried further into the building to form more soil reservoirs. Additionally, the oil content (15%) of the soil causes particles to stick to carpet fiber and resist vacuuming. To restore the carpet to its best condition, frequent light cleaning gives the best result and is often very cost effective.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.



4 tile view
1/4 turned
Night Stone

YOUR AUTHORIZED SALES REPRESENTATIVE:

VG_GRIFFINTILE_073026

van Gelder, Inc.
www.vangelder-inc.com
+1 866 284 6287

