



CLASS
1


SENATOR SOFTSTEP™ PLUS

28 OZ. NEEDLEFELT ANTI-FATIGUE CARPET TILE

*Check all your boxes off
with this tried-and-true
anti-fatigue commercial
carpet tile.*

Senator SoftStep™ Plus carpet tile is ideal across a range of environments. This tile is perfect for facilities that require floor covering that must endure the constant impact from employees standing for multiple hours. It's anti-fatigue backing provides superior comfort and relief to aching feet and tired legs.

- Re-engineered to be a Class 1 product
- The warmth and resilience of velour carpeting
- A favorite in pharmacies for comfort
- Easy to install and maintain
- **Now available in 18"x 18" or 18" x 36" carpet tiles**

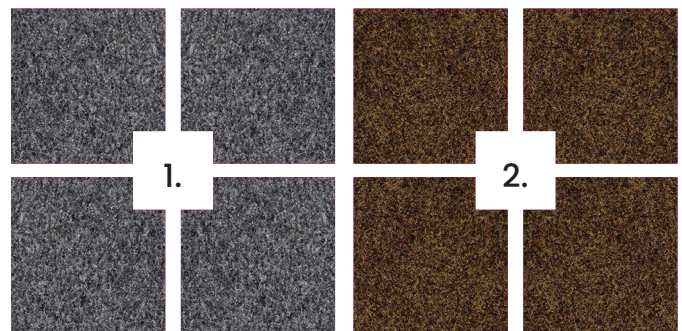

01. Charcoal

02. Brown



3/8" Thick Foam

SOLUTIONS FOR EVERY ENVIRONMENT
1+ 866 284 6287 | www.vangelder-inc.com

SENATOR SOFTSTEP™ PLUS

28 OZ. NEEDLEFELT ANTI-FATIGUE CARPET TILE



SUGGESTED USES (NOT LIMITED TO)

Pharmacies, Interior Drive thru areas, Reception areas, or areas where long-term standing is required

Construction:	Non-woven Dense velour pattern
Fiber:	100% Polyester Non-woven Dirlour with coating
Primary Backing:	Closed cell expanded PVC
Pile Height (± 0.5mm):	0.24"
Total Height (± 7.5%):	0.62"
Pile Weight (± 7.5%):	28 oz/sy
Total Weight (± 7.5%):	359 oz/sy
Tile Size (± 2%):	18" x 18" or 18" x 36"
Cushion Density:	14 lbs/cu. ft. nominal

LIMITED WARRANTY

Full Commercial Warranty 5 years

Summary of Warranty:

van Gelder, Inc. warrants Carpet Tiles against wear for a period of 5 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to van Gelder, Inc. within the Warranty period, van Gelder, Inc. will supply new material of same or similar grade to repair or replace the defective material. Wear Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 1 year from date of purchase, van Gelder, Inc. will provide replacement materials or repair, of only the effected area.

Manufacturing Defects:

van Gelder, Inc. warrants Carpet Tiles materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to five [5] years from date of purchase. van Gelder, Inc. will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.

Other Limitations:

- This warranty is non-transferable.
- Manufacturing defect must be reported within 3 months from date of purchase.
- This Warranty covers only properly installed & maintained floors.
- van Gelder, Inc. excluded and will not pay for any consequential or incidental expenses.

van Gelder, Inc. reserves the right of final judgment and may refuse claims in certain instances.

**For a copy of the full warranty please ask for a warranty sheet.*

PACKAGING & DIMENSIONS

Tiles 18" x 18":	10 tiles per box (22.5 sq. ft.)
Tiles 18" x 36":	10 tiles per box (45 sq. ft.)

ELECTROSTATIC PROPERTIES

Dimensional Stability (EN 986):	Pass
Electrostatic Propensity (EN 1815):	>2kV
Electrical Resistivity (IBM / ICL):	Pass, for R.H. ≥40%
Sound Insulation (ISO 10140-1:2010):	≥24dB
Thermal Retention (ISO 11092):	0.13 m K/W Pass

COLOR FASTNESS

To Light (ISO 105 B02):	5
To Water (ISO 105 E01):	4-5
To Shampoo (ISO 105 C06):	5
To Rubbing (ISO 105 X12):	4-5 (Dry/Wet)

FLAMMABILITY

Radiant Panel (ASTM E648):	Class I
Smoke Density (ASTM E662):	Pass
Surface Flammability (FF 1-70 / ASTM D2859):	Pass
LEED-NC	MR CREDIT 4 IEQ CREDITS 4.1, 4.3, 5

INSTALLATION (TILE)

Before laying tiles, it is recommended they are stored at room temperature 60°F-70°F (15°C-20°C). The tiles can be loose laid on flat, dry floors free from impurities such as oil, grease etc. Cracked floors should be filled, and uneven floors covered with hardboard. Dusty floors should be primed. Because of the high insulation value of these tiles it is not recommended they be laid when under-floor heating systems are in use. On very large installations, it is advisable to secure 1 in 5 rows with double-sided tape Where tiles are to be used under caster chairs, tiles should be fully secured. The tiles may be laid by marking across in the center of the room and working outwards from this, the marker cross may be moved to facilitate these of full tiles in doorways, etc. Tiles must be laid by turning alternate tiles 90 degrees to obtain a checker pattern. An arrow on the back of each tile indicates the pile direction. Only tiles with the same batch number should be laid together.

MAINTENANCE

Regular vacuuming (Weekly in low-traffic areas, and daily or twice daily in areas with higher traffic) with a motor-driven brush and beater bar can remove up to 80% of surface dirt, and is the easiest way to prolong the life of your carpet.

Regular vacuuming is key to maintaining your carpet, but eventually the carpet color dulls from dirt and grime stuck in the fibers. The dirt is then carried further into the building to form more soil reservoirs. Additionally, the oil content (15%) of the soil causes particles to stick to carpet fiber and resist vacuuming. To restore the carpet to its best condition, frequent light cleaning gives the best result and is often very cost effective.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

YOUR AUTHORIZED SALES REPRESENTATIVE:

VG_SENATORSOFTSTEPPLUS_122723



van Gelder, Inc.
www.vangelder-inc.com
+1 866 284 6287

EXPERIENCE IT FOR YOURSELF

Talk with your sales representative or request samples at samples@vangelder-inc.com