



20  
MIL

# NATURES VIEW OAK COLLECTION

4" X 36" LUXURY VINYL PLANKS  
TRADITIONAL FLOORING COLORS

- **NATURAL LOOK**  
four lifelike oak looks to choose from
- **EASY MAINTENANCE**  
no special cleaners, sealers or wax necessary
- **DURABLE CONSTRUCTION**  
resilient 20 mil vinyl for high-traffic areas




*The warmth and appeal of hardwood with the resilience and ease of maintaining vinyl.*


Ranging from light to medium-dark oak tones in 4" x 36" planks, Natures View Oak Collection luxury vinyl planks give a classic welcoming look to any environment.

Composed of three vinyl layers - a heavy-gauge vinyl backing layer, a vinyl print film layer, and a tough vinyl top wear layer - with an annealed construction, Natures View planks offer excellent dimensional stability and wear resistance along with superior stain resistance and lower maintenance.

By offering all the advantages of vinyl and adding the look and texture of natural materials, your luxury wood vinyl plank design choice is Natures View.

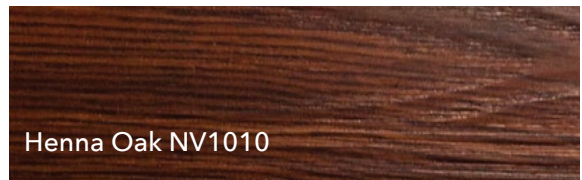


Henna Oak NV1010

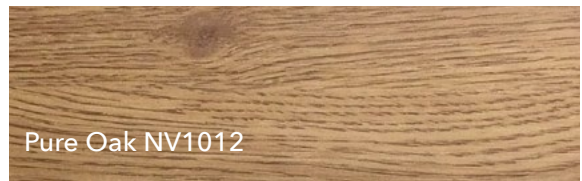

Pure Oak NV1012



Honey Oak NV1018

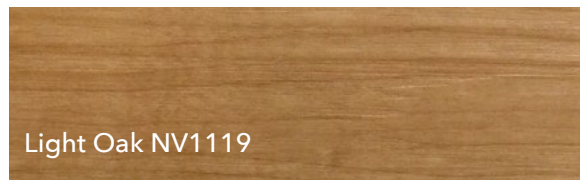

Light Oak NV1119



CERTIFIED BY  
SCS Global Services

# NATURES VIEW OAK COLLECTION

## 4" X 36" LUXURY VINYL PLANKS



### SUGGESTED USES

Beauty Salons, Conference Rooms, Corporate Lunchrooms, General Office, Hospitals, Libraries, Pharmacies, Retail/Department Stores, Resorts, Restaurants, Spas and Supermarkets

Overall Thickness 3.0mm | 0.120"  
 Wear Layer Thickness 0.5 mm | 20mil  
 Plank Size 4" x 36"

### LIMITED WARRANTY

Full Commercial Warranty 10 years  
 Limited Residential Warranty 16 years

Summary of Warranty \*For a copy of the full warranty please ask for a warranty sheet  
 Natures View planks must be professionally installed to validate the warranty.

van Gelder, Inc. warrants Natures View Oak Collection first quality planks against wear for a period of 10 years in a commercial application, and 20 years in a residential application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to van Gelder, Inc. within the Warranty period, van Gelder, Inc. will supply new material of same or similar grade to repair or replace the defective material.

#### Wear

Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 16 years from date of purchase, van Gelder, Inc. will provide replacement materials or repair, of only the effected area.

#### Manufacturing Defects

van Gelder, Inc. warrants style Oak first quality plank materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. van Gelder, Inc. will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.

#### Other Limitations

- This warranty is non-transferable
- Manufacturing defect must be reported within 3 months from date of purchase.
- This Warranty covers only properly installed & maintained floors
- van Gelder, Inc. excluded and will not pay for any consequential or incidental expenses.
- van Gelder, Inc. reserves the right of final judgment and may refuse claims in certain instances.

### PACKING & DIMENSIONS

Plank 4" x 36": 30 planks/carton  
 Sq. Ft. per carton: 30 sq. ft  
 Overall Thickness 3.0mm | 0.12"  
 Wear Layer Thickness 0.5mm | 20mil  
 Weight: 29.76 lbs./carton


### Technical Specs (ASTM 1700-99)

Heat Stability (ASTM 1514) Pass  
 Abrasion Resistance (ASTM D3389) 0.284g/5000 cycles (Excellent)  
 Static Load (ASTM F970 - Modified) 1400 psi  
 Sound Insulation (DIN 52210) 4dB  
 Slip Resistance (ASTM D 2047) Pass: 0.61 (Exceeds ADA Standards)  
 Stain & Chemical Resistance (ASTM 925) Pass (Excellent)  
 Light Resistance (F 1515) Pass (Excellent)  
 Residual Indentation (F 1914) Pass (<8%)

### Flammability Rating

Radiat Panel Test (ASTM E648-06) Class 1  
 Smoke Density (ASTM E662) Pass (<450 sdi)  
 Heat Stability (ASTM 1514) Pass (Excellent)  
 HUD/FHA Requirements Exceeds

### PRODUCT CONSTRUCTION

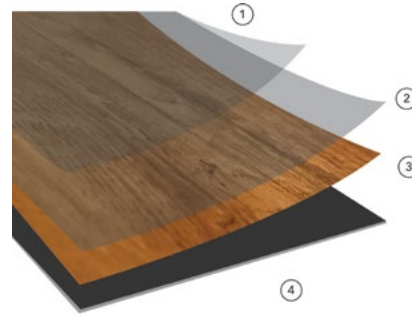

- 1x Coating**  
Excellent stain, abrasion and fade resistance with anti-bacterial properties. Easy to maintain and no need to wax.
- Transparent 40mil Wear Layer**  
Extremely durable, high-purity vinyl wear layer for superior performance in heavy commercial traffic spaces.
- Printed Layer**  
Realistic design gives each tile or plank its pattern and color.
- Vinyl Backing & Extruded Vinyl Core Layers**  
High-performance vinyl backing ensures dimensional stability, durability and rigidity.

### MAINTENANCE

We recommend using a non-rising cleaner that leaves no film and suggest that you vacuum, sweep or dust mop twice per week. High-traffic areas might require more frequent cleaning.

Wipe up food and other spills immediately using recommended cleaner and a soft cloth. You should NEVER USE ABRASIVE CLEANERS, POWDERS, OIL CLEANERS, WAXES OR DISH DETERGENT. These will scratch the surface or leave a film.

When using a vacuum, if possible turn off the beater and use a hose or wand with an upholstery attachment. Vacuum wheel may also be a source for indenting and scuffing, check the wheels for embedded grit.

To remove scuff marks you can use a soft cloth to rub it out. If they difficult to remove try using a product named "Oops Painter Wipes". Rinse the area well afterwards with clean warm water and allow to dry. Please note that these procedures may help remove stains from vinyl floors, but cannot guarantee complete removal. Burns, holes or "permanent" stains may require a replacement "patch of that section of the floor.

To remove damaged planks you can use a hair dryer, which heats up the adhesive allowing the plank to be picked up. When the plank is up, use a wide blade putty knife and pull it out, then put the new plank down once the surface has been prepared. You should NEVER USE A HEAT GUN as this emits too much heat and will damage the planks.

### IMPORTANT NOTICE

Sample swatches have been cut from an overall design, decoration & shade may vary. The random nature of wood and other natural materials from which our patterns are designed means that significant color and design variation is normal and enhances the look of the planks.

### YOUR AUTHORIZED SALES REPRESENTATIVE:

vGIS\_NVO436\_120419



van Gelder, Inc.  
www.vangelder-inc.com  
+1 866 284 6287

### EXPERIENCE IT FOR YOURSELF

Talk with your sales representative or request samples at [samples@vangelder-inc.com](mailto:samples@vangelder-inc.com)