



DIAMOND PLATE SAFETY STEP

9/16" DIAMOND-EMBOSSED ANTI-FATIGUE MATTING


Improves worker morale by providing relief to aching feet and tired legs.

Bright yellow borders promote workplace safety along with a rugged, durable, PVC/Nitrile rubber anti-fatigue matting. Diamond-Plate's cushioned surface allows employees to stand or walk on beveled edges.

- Superior comfort and long term performance
- Improve worker morale by providing relief to lower back and lower limbs



Solid Black

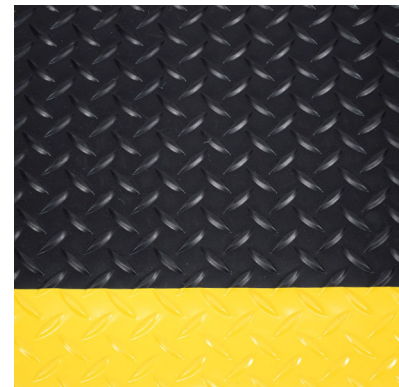

Black with Yellow Border

SOLUTIONS FOR EVERY ENVIRONMENT
1+ 866 284 6287 | www.vangelder-inc.com

DIAMOND PLATE SAFETY STEP

9/16" ANTI-FATIGUE MATTING



SUGGESTED USES (Not limited to)

Checkstands, floral departments, offices, light-duty work areas.

Manufacturing Process:	Fusion-bonded Composite
Wear Surface:	Diamond-patterned Vinyl
Cushioning:	Closed-cell PVC Foam
Overall Gauge ($\pm 0.050"$):	$\sim 9/16"$
Wear Layer Gauge ($\pm 0.10"$):	$\sim 1/8"$
Foam Cushion Density:	~ 20 lbs/ cu. ft.
Total Weight:	~ 1.7 lbs/sq. ft.
Available Matt Sizes:	2' x 3' 3' x 5' 3' x 10'
Roll Sizes:	2' x 75' 3' x 75' 4' x 75'
Custom Sizes:	
Widths:	2', 3', 4' & Custom Sizes
Lengths:	up to 60'

LIMITED WARRANTY

Full Commercial Warranty 1 year

Summary of Warranty:

van Gelder Inc. warrants Diamond Plate Safety Step Anti-Fatigue Matting against wear for a period of 1 year in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Van Gelder Inc. within the warranty period, Van Gelder Inc. will supply new material of same or similar grade to repair or replace the defective material.

- **Wear**
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 1 year from date of purchase, van Gelder Inc. will provide replacement materials or repair, of only the effected area.
- **Manufacturing Defects**
van Gelder Inc. warrants Diamond Plate Safety Step Anti-Fatigue Matting materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. van Gelder Inc. will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- **Other Limitations**
 - This warranty is non-transferable.
 - Manufacturing defect must be reported within 3 months from date of purchase.
 - This warranty covers only properly installed & maintained floors.
 - van Gelder Inc. excluded and will not pay for any consequential or incidental expenses.
 - van Gelder Inc. reserves the right of final judgment and may refuse claims in certain instances.

*For a copy of the full warranty please ask for a warranty sheet.

TECHNICAL SPECIFICATIONS

Tensile Strength (ASTM D412):	1200 lbs/sq. in.
Graves Tear Strength (ASTM D1004):	150 lbs.
Elongation (ASTM D412):	200% Longitudinal
Abrasion Resistance:	< 1% Loss
Taber Abrasion:	1000 cycles, 1000g load, CS-17 Wheel
Hardness (ASTM D2240):	80 ± 5 (Shore 'A'); 6 months aging (negligible Δ)
Compression:	12% Max
Static Coefficient of Friction (ASTM C1028):	0.78 (Dry)

FLAMMABILITY

Flame Resistance (FMVSS 302) Pass

MAINTENANCE

Diamond Plate Safety Step can be mopped or wiped clean with a damp cloth.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

NOTES:

YOUR AUTHORIZED SALES REPRESENTATIVE:

VG_ISS_DIAMONDPLATE_121422



van Gelder, Inc.
www.vangelder-inc.com
+1 866 284 6287

EXPERIENCE IT FOR YOURSELF

Talk with your sales representative or request samples at samples@vangelder-inc.com