



NATURES VIEW STYLE RUSTIQUE

40 MIL | 7" X 48" LUXURY VINYL PLANKS



Sophisticated style and performance meets the ease and durability of luxury vinyl.

Washed in deep hues and a contemporary color palette, Natures View Style Rustique 7" x 48" luxury vinyl plank provides long-lasting beauty with incredible ease of maintenance.

- Ceramic-bead technology that makes the line forgiving and able to withstand heavy wear
- Excellent dimensional stability and wear resistance
- Natures View Style Rustique 7" x 48" luxury vinyl plank is a great long-term solution flooring.

SOLUTIONS FOR EVERY ENVIRONMENT
1+ 866 284 6287 | www.vangelder-inc.com



01. Antique Brown NVR9415*




07. Canyon Dust Cross-Cut NVR5476*




02. Dove NVR7283



08. Honduran Rosewood NVR9822



03. Cape Cod Grey NVR7285



09. African Blackwood NVR9848



04. Silver Sand NVR6841



10. Sundried Teak NVR7305



05. Anchor Grey NVR6846



11. Windswept Beige NVR9844



06. Wheatfields NVR9825



12. Oak Barrel NVR9675



13. Whiskey Cross-Cut NVR5478*

*Note: Antique Brown NVR9415, Canyon Dust Cross-Cut NVR5476 and Whiskey Cross-Cut NVR5478 are not registered embossed.

NATURES VIEW STYLE RUSTIQUE

7" X 48" LUXURY VINYL PLANKS



SUGGESTED USES

Beauty Salons, Conference Rooms, Corporate Lunchrooms, General Office, Hospitals, Libraries, Pharmacies, Retail/Department Stores, Resorts, Restaurants, Spas and Supermarkets

Manufacturing Standard:	Class III Printed Film Vinyl Plank; 1x Coated Registered Embossed Surface
Overall Thickness	3.175mm 0.125"
Wear Layer Thickness	1.0mm 40mil
Plank Size	7" x 48"

LIMITED WARRANTY

Full Commercial Warranty 21 years

Summary of Warranty *For a copy of the full warranty please ask for a warranty sheet Natures View planks must be professionally installed to validate the warranty. van Gelder Inc. warrants Natures View Style Rustique first quality planks against wear for a period of 21 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to van Gelder Inc. within the warranty period, van Gelder Inc. will supply new material of same or similar grade to repair or replace the defective material.

- **Wear**
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 21 years from date of purchase, van Gelder Inc. will provide replacement materials or repair, of only the effected area.
- **Manufacturing Defects**
van Gelder Inc. warrants Style Rustique first quality plank materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. van Gelder Inc. will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- **Other Limitations**
 - This warranty is non-transferable.
 - Manufacturing defect must be reported within 3 months from date of purchase.
 - This Warranty covers only properly installed & maintained floors.
 - van Gelder Inc. excluded and will not pay for any consequential or incidental expenses.
 - van Gelder Inc. reserves the right of final judgment and may refuse claims in certain instances.

PACKING & DIMENSIONS

Plank 7" x 48":	15 planks/carton
Sq. Ft. per carton:	35 sq. ft
Overall Thickness	3.175mm 0.125"
Wear Layer Thickness	1.0mm 40mil
Weight:	34.81 lbs./carton

TECHNICAL SPECIFICATION

Stability (EN 986)	Pass
Abrasion Resistance (EN 660)	Excellent (<0.15g/1000 cycles)
Static Load (ASTM F970 - Modified)	2000 psi
Sound Insulation (DIN 52210)	4dB
Slip Resistance (ASTM D 2047)	Pass (Exceeds ADA Recommendations)
Stain & Chemical Resistance (ASTM 925)	Pass
Light Resistance (F 1515)	Pass
Indentation Resistance (F 1914)	Pass (<8%)

FLAMMABILITY RATING

Radiant Panel Test (ASTM E648)	Class 1
Smoke Density (ASTM E662)	Pass (<450 sdi)
Heat Stability (ASTM 1514)	Pass
HUD/FHA Requirements	Exceeds


LEED NC: Our FloorScore certification allows this product to be eligible to earn LEED credits.

EXPERIENCE IT FOR YOURSELF

Talk with your sales representative or request samples at samples@vangelder-inc.com

IMPORTANT NOTICE

Sample swatches have been cut from an overall design, decoration & shade may vary. The random nature of wood and other natural materials from which our patterns are designed means that significant color and design variation is normal and enhances the look of the planks.

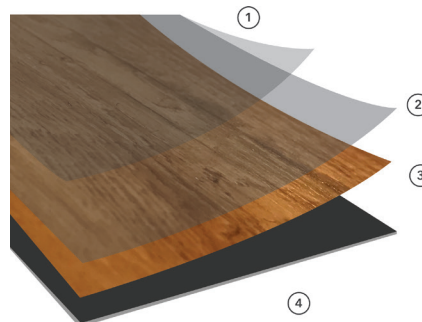

PRODUCT CONSTRUCTION

1. **Ix Coating**
Excellent stain, abrasion and fade resistance with anti-bacterial properties. Easy to maintain and no need to wax.
2. **Transparent 40mil Wear Layer**
Extremely durable, high-purity vinyl wear layer for superior performance in heavy commercial traffic spaces.
3. **Printed Layer**
Realistic design gives each tile or plank its pattern and color.
4. **Vinyl Backing & Extruded Vinyl Core Layers**
High-performance vinyl backing ensures dimensional stability, durability and rigidity.

MAINTENANCE

We recommend using a non-rising cleaner that leaves no film and suggest that you vacuum, sweep or dust mop twice per week. High-traffic areas might require more frequent cleaning.

Wipe up food and other spills immediately using recommended cleaner and a soft cloth. You should NEVER USE ABRASIVE CLEANERS, POWDERS, OIL CLEANERS, WAXES OR DISH DETERGENT. These will scratch the surface or leave a film.

When using a vacuum, if possible turn off the beater and use a hose or wand with an upholstery attachment. Vacuum wheel may also be a source for indenting and scuffing, check the wheels for embedded grit. To remove scuff marks you can use a soft cloth to rub it out. If they difficult to remove try using a product named "Oops Painter Wipes". Rinse the area well afterwards with clean warm water and allow to dry. Please note that these procedures may help remove stains from vinyl floors, but cannot guarantee complete removal. Burns, holes or "permanent" stains may require a replacement "patch of that section of the floor.

To remove damaged planks you can use a hair dryer, which heats up the adhesive allowing the plank to be picked up. When the plank is up, use a wide blade putty knife and pull it out, then put the new plank down once the surface has been prepared. You should NEVER USE A HEAT GUN as this emits too much heat and will damage the planks.

YOUR AUTHORIZED SALES REPRESENTATIVE:

VG_NVR7x48_102522



van Gelder, Inc.
www.vangelder-inc.com
+1 866 284 6287