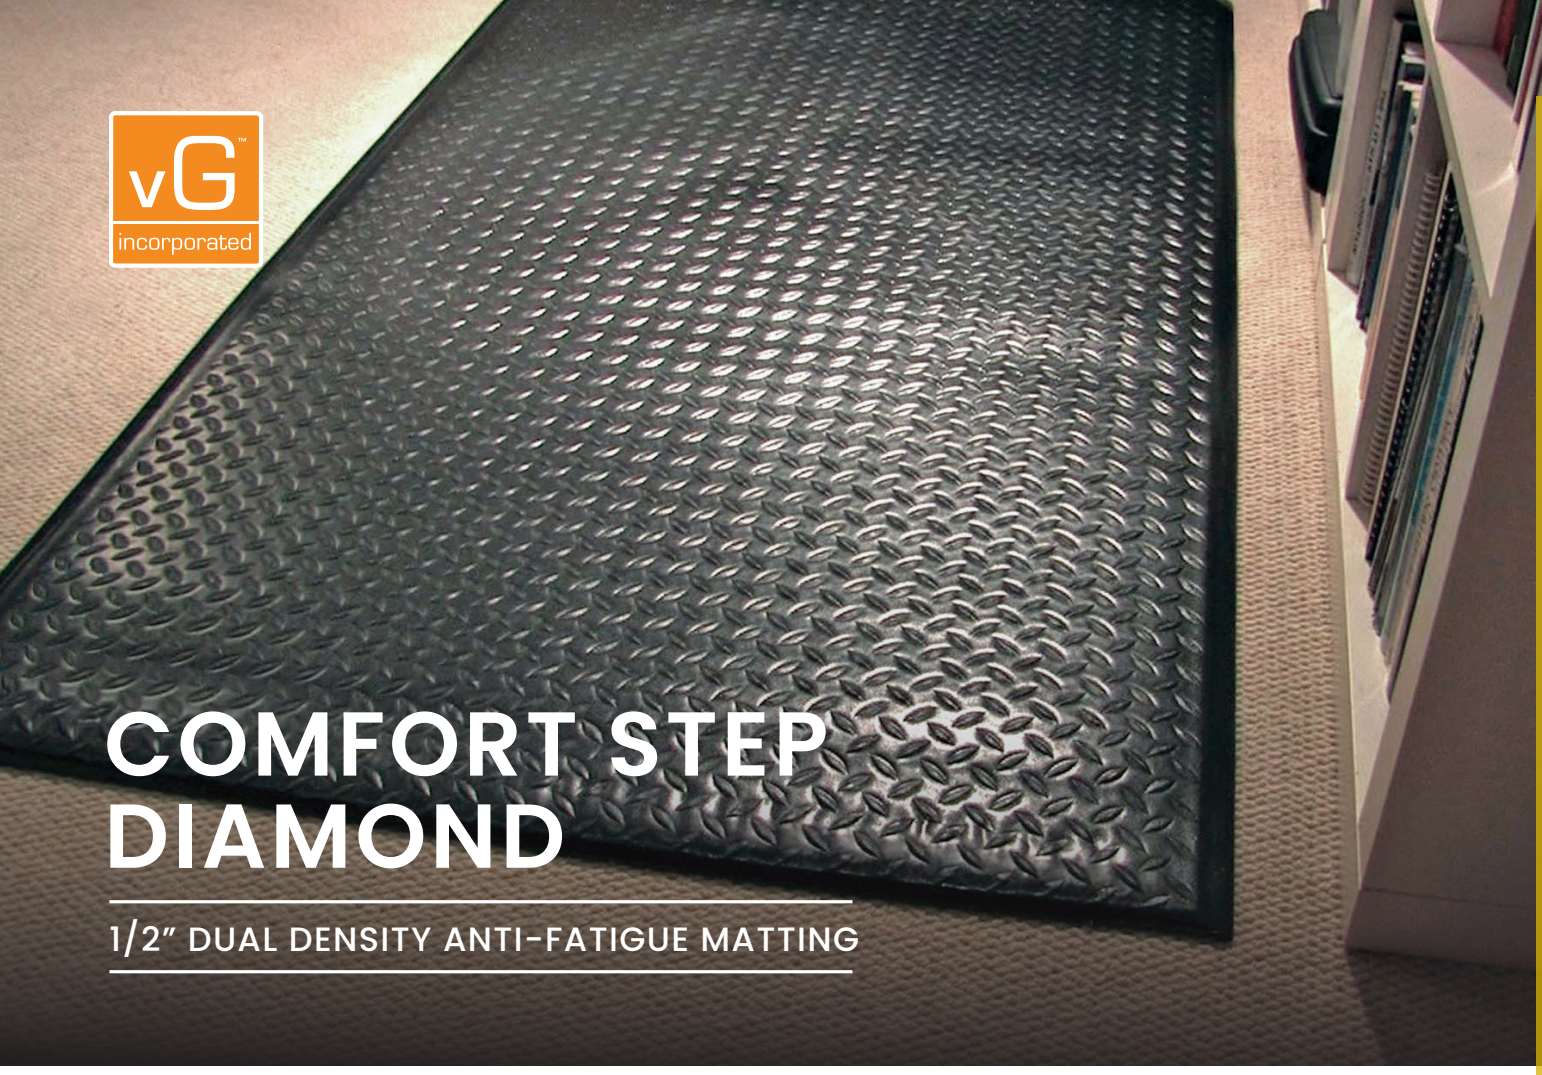

COMFORT STEP DIAMOND

1/2" DUAL DENSITY ANTI-FATIGUE MATTING

The ideal balance of comfort and performance in an anti-fatigue mat.

An engineering marvel, Comfort Diamond has a durable, integrated slip-resistant wear layer of high-density vinyl foam polymetrically bonded to a resilient and supportive vinyl sponge cushion. Its smooth yet supple wear layer is easy to clean, while the expanded foam sponge reduces stress on legs and joints for added comfort and performance.

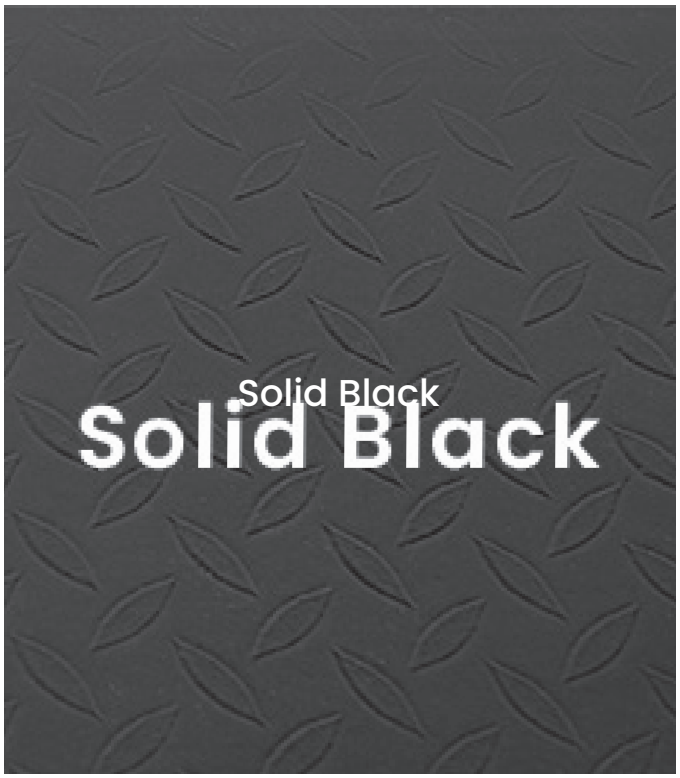

COMFORT DIAMOND ANTI-FATIGUE MATTING | DIVISION 9 | ZONE 3

SOLUTIONS FOR EVERY ENVIRONMENT
1+ 866 284 6287 | www.vangelder-inc.com

COMFORT STEP DIAMOND

1/2" DUAL DENSITY ANTI-FATIGUE MATTING

3 ZONE | INDOOR | MADE IN USA

SUGGESTED USES (Not limited to)

Customer service areas, industrial areas, light-duty work areas, etc.

Manufacturing Process:	High density vinyl foam polymerically bound to a moisture resistant a closed-cell vinyl sponge
Surface Aspect:	Diamond, Pebble
Overall Gauge (± 10%):	0.500" ± 0.050" (1/2", 500mils)
Available Sizes:	2' x 3' | 3' x 5' | 3' x 12' | 3' x 60' | 4' x 60' Custom Sizes at a Premium.

Limited Warranty

Full Commercial Warranty 1 year

Summary of Warranty:

van Gelder Inc. warrants Comfort Diamond Dual-Layer Anti-Fatigue Matting against wear for a period of 1 year in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to van Gelder Inc. within the warranty period, van Gelder Inc. will supply new material of same or similar grade to repair or replace the defective material.

- Wear

  Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 1 year from date of purchase, van Gelder Inc. will provide replacement materials or repair, of only the effected area.

- Manufacturing Defects

  van Gelder Inc. warrants Comfort Diamond Dual-Layer Anti-Fatigue Matting materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. van Gelder Inc. will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.

- Other Limitations
  - This warranty is non-transferable.
  - Manufacturing defect must be reported within 3 months from date of purchase.
  - This warranty covers only properly installed & maintained floors.
  - van Gelder Inc. excluded and will not pay for any consequential or incidental expenses.
  - van Gelder Inc. reserves the right of final judgment and may refuse claims in certain instances.

**For a copy of the full warranty please ask for a warranty sheet.*

TECHNICAL SPECIFICATIONS

Tensile Strength (ASTM D412, Die C):	50 lbs/sq. in. minimum
Elongation (ASTM D412, Die C):	75% minimum
Tear Strength (ASTM D624, Die C):	15 lbs/in minimum
Durometer (ASTM D2240):	75 ± 5 (Shore OO)

FLAMMABILITY

Horizontal Burn Test (DOT FMVSS 302):	Pass
Methenamine Tablet Test (CPSC FF 1-70)	Pass, < 1" diameter

MAINTENANCE

Comfort Diamond can be mopped or wiped clean with a damp cloth.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

NOTES:

YOUR AUTHORIZED SALES REPRESENTATIVE:

EXPERIENCE IT FOR YOURSELF

Talk with your sales representative or request samples at samples@vangelder-inc.com

van Gelder, Inc.
www.vangelder-inc.com
+1 866 284 6287

vG incorporated

VG_COMFORTSTEPDIAMOND_021624