




# SNAP TRAX PLUS

MODULAR GRID SYSTEM WITH CARPET

*Effectively scrape off dirt, mud, sand and initial moisture before entering a building.*

Snap Trax Plus is a modular, interlocking tile system made from recyclable TPE/PVC UV-resistant compound. This dimensionally stable tile will not shrink or gap while effectively scrapping dirt and other debris from foot traffic.

- Patent pending locking clip to keep grids in place in high shear locations.
- Interlocking 50cm x 50cm tiles allow versatility and customization for virtually any vestibule.
- Ability to link both carpeted and non-carpet versions in the same grid to offer better wiping/scrapping in one system!
- Rugged TPE/PVC capable of handling 600 lb rolling load.
- Large free area for dirt to fall through.
- TPE/PVC compound is dimensionally stable in all environmental conditions.

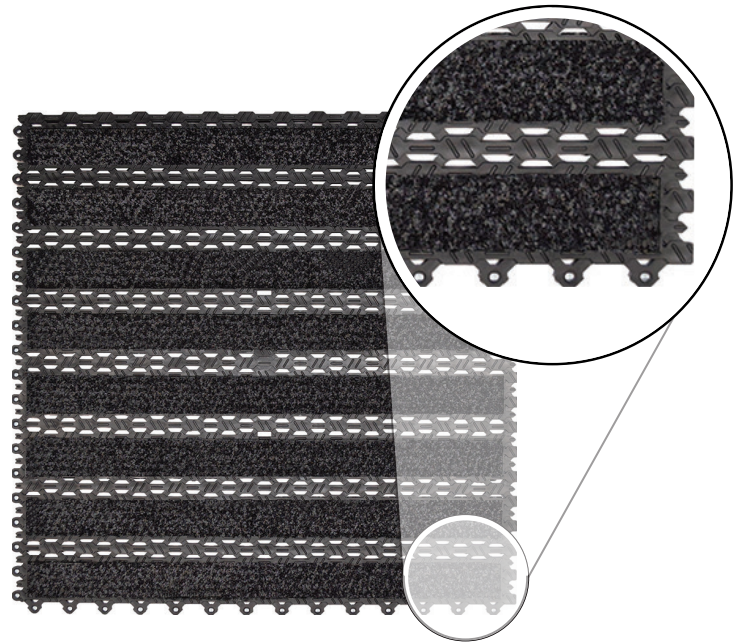

## 1. Dark Grey (Stocked)

Note: More colors available for Custom Orders, ask your rep today.



- Patent pending locking clip to keep grids in place in high shear locations.

SOLUTIONS FOR EVERY ENVIRONMENT  
1+ 866 284 6287 | www.vangelder-inc.com

# SNAP TRAX PLUS TILE

## MODULAR GRID SYSTEM WITH CARPET



### SUGGESTED USES (NOT LIMITED TO)

Class A Buildings, Grocery & Department Stores, Lobbies, Libraries, Office Environments, Retail Showrooms, etc.

### SPECIFICATIONS

Snap Trax with Carpet

Construction:	TPE/PVC with Nylon Carpet
Total Height:	0.47"
Total Weight:	3.0 lbs
Insert Carpet:	8.70" x 1.38"
Tile Size:	19.69" x 19.69"
Tiles (19.69" x 19.69" ea.):	12 tiles per box (32.5 sq. ft.)

### SNAP TRAX WITHOUT CARPET (ALSO AVAILABLE)

Construction:	100% TPE
Total Height:	0.47"
Total Weight:	2.5 lbs
Tile Size:	19.69" x 19.69"
Tiles (19.69" x 19.69" ea.):	10 tiles per box (27.1 sq. ft.)

### SNAP TRAX CLIPS

Clip Material:	304 Stainless Steel
Clip Color:	Black (Electro Coating)
Clip Size:	5.7" x 0.55"
Clip Thickness:	2mm
Clip Weight:	0.4kg

### LIMITED WARRANTY

2 years - Ask for warranty sheet for details

### MAINTENANCE

**VACUUMING:** Proper vacuuming is the single most important part of a preventive maintenance program. The following should be taken into consideration for how often to vacuum; Snap Trax location, appearance expectations, type of vacuum equipment available, anticipated traffic upon each location, and soiling conditions prevalent to the location.

**SPOT CLEANING:** For maintaining an appearance level, spots and stains can be the greatest challenge. The key to successfully removing a spot or stain is immediate action. This requires daily inspections. For a spill, blot immediately with a clean, white absorbent cloth, and work from the edge of the spot towards the center to help prevent it from spreading. Spots should be removed using an industrial grade spot remover. For oily stains a nonflammable dry cleaning solvent works best. When it comes to chewing gum, a can of freezing solution will easily break down the gum to be vacuumed away.

### PERIODIC MAINTENANCE (AS NEEDED):

The Snap Trax product allows for dirt and moisture to fall through to the surface underneath. This will require periodic cleaning by using the following process: remove the product to clean/sweep debris from within recess. Wash and scrub to remove any caked on debris. Vacuum carpets with heavy duty cleaning equipment that use rotating brushes. Use pile - lifting cleaning equipment to restore fibers to natural position.

For Restorative Carpet Cleaning processes please contact your van Gelder Inc. sales representative.

### EXPERIENCE IT FOR YOURSELF

Talk with your sales representative or request samples at [samples@vangelder-inc.com](mailto:samples@vangelder-inc.com)

### TECHNICAL SPECIFICATIONS

Friction (ASTM D-2047-96)	Wet .60
Standard Rolling Load	600lbs/wheel
Fire Resistance (ASTM E648)	Class 1
UV Resistance	Utilizes recyclable, UV resistant PVC/NBR

### ENVIRONMENT

van Gelder Inc. does not use any substances currently included in the SVHC (Substances of Very High Concern) list under REACH (Registration, Evaluation, Authorization and Restriction of Chemical substances) in any matting products. All PVC grid products are 100% recyclable.

### LEED-NC:

Version 3 IEQ Credit 5, 4.3 | MR Credit 4, 6

### INSTALLATION

**PREPARATION:** Before commencing installation, visually check the area and remove any lumps or ridges in the base that may be present. Vacuum and/or sweep as needed.

It is recommended that the entrance flooring system be installed as one of the final jobs to avoid damage associated with general building works. Unpack and inspect all materials to ensure they are free from transport damage. Check all components and tools required are available. Unroll/unpack the sections of matting and lay in a clean dry protected area to acclimatise and relax. Depending on duration of storage and ambient temperature, this process may take up to 24 hours. A heat gun can be used to aid relaxation of matting. When handling the rolls or large panels of matting at any time during the installation, avoid dragging or rough handling that may cause stretching or distortion.

**TOOLS REQUIRED:** Square, utility knife, a drill with 1/8" and 5/16" bits, a #2 Phillips fastener and a tape measure.

For more information on how to install Snap Trax in your space, contact your van Gelder Inc. sales representative.

### YOUR AUTHORIZED SALES REPRESENTATIVE:

VG\_ISS\_SNAPTRAXPLUS\_011124



**van Gelder, Inc.**  
www.vangelder-inc.com  
+1 866 284 6287